

fixed-mounted circuit breaker 3-pole, size I, IEC In=630A to 690V, AC50/60Hz
Icu=55kA at 500V rear connection horizontal Overcurrent release ETU 25 LSI
protection adjustable 0.4-1 in With manual operating mechanism with storage with
mechanical request without 1st auxiliary release without 2nd auxiliary release
2NO+2NC

Model	
product brand name	SETRON
product designation	ACB
design of the product	IEC 60947-2
design of the actuating element	Pushbutton
type of the driving mechanism	Manual operating mechanism with mechanical closing
type of the driving mechanism / motor drive	No
design of the overcurrent release	ETU25B
General technical data	
number of poles	3
size of the circuit-breaker	1
utilization category	B
circuit-breaker / Design	3WL1
Voltage	
Rated insulation voltage Ui	1 000 V
insulation voltage / rated value	1 000 V
operating voltage	
• at AC / at 50/60 Hz / rated value	690 V
Protection class	
protection class IP	IP20
• protection class IP / on the front	IP20
• protection function of the overcurrent release	LSI
Dissipation	
power loss [W]	
• for rated value of the current / at AC / in hot operating state / per pole	33.3 W
• maximum	100 W
Main circuit	
operating frequency	
• 1 / rated value	50 Hz
• 2 / rated value	60 Hz
Auxiliary circuit	
number of NC contacts / for auxiliary contacts	2
number of NO contacts / for auxiliary contacts	2
Suitability	
suitability for use	Plant / motor protection
Adjustable parameters	
adjustable current response value current / of the current-dependent overload release / initial value	252 A
Product details	
product component	
• trip indicator	Yes
• voltage trigger	No
• undervoltage release	No
design of the auxiliary switch	2 NO + 2 NC
product extension / optional / motor drive	Yes
Product function	
product function	

● grounding protection	No	
● phase failure detection	Yes	
Display and operation		
display version	without display	
Short circuit		
operating short-circuit current breaking capacity (Ics)		
● at 415 V / rated value	55 kA	
● at 500 V / rated value	55 kA	
● at 690 V / rated value	42 kA	
maximum short-circuit current breaking capacity (Icu)		
● at 415 V / rated value	55 kA	
● at 500 V / rated value	55 kA	
● at 690 V / rated value	42 kA	
Connections		
arrangement of electrical connectors / for main current circuit	Main connection rear side horizontal	
type of electrical connection / for main current circuit	busbar connection	
Mechanical Design		
height	439.5 mm	
width	320 mm	
depth	337 mm	
fastening method	fixed mounting	
Environmental conditions		
ambient temperature / during operation		
● minimum	-20 °C	
● maximum	70 °C	
ambient temperature / during storage		
● minimum	-40 °C	
● maximum	70 °C	
General Product Approval		
	EMC	Declaration of Conformity

[Confirmation](#)



Test Certificates			Marine / Shipping		
Special Test Certificate	Miscellaneous	Type Test Certificates/Test Report			
Marine / Shipping			other		
	CCS / China Classification Society		Miscellaneous	Confirmation	Miscellaneous

Dangerous Good	Environment
Transport Information	Environmental Conformations



الکتروم | نمایندگی اتوماسیون صنعتی زیمنس
۰۲۱-۳۶۰۵۹۹۹۲

Further information
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=3WL1106-2CB32-1AA2

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WL1106-2CB32-1AA2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mfb=3WL1106-2CB32-1AA2

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications


<http://www.siemens.com/specifications>

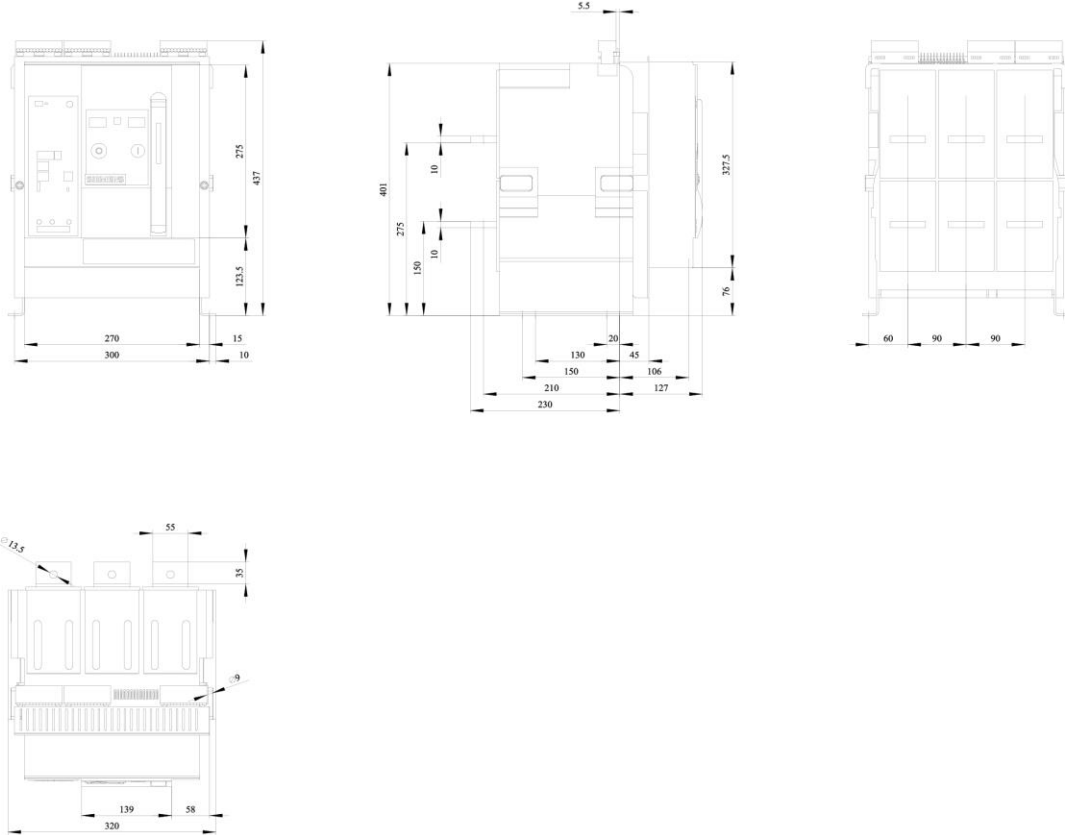

SIEMENS
ELECTROJAM-SIEMENS.COM
Ingenuity for life

الکتروجم | نمایندگی اتوماسیون صنعتی زیمنس

۰۲۱-۳۶۰۵۹۹۹۲

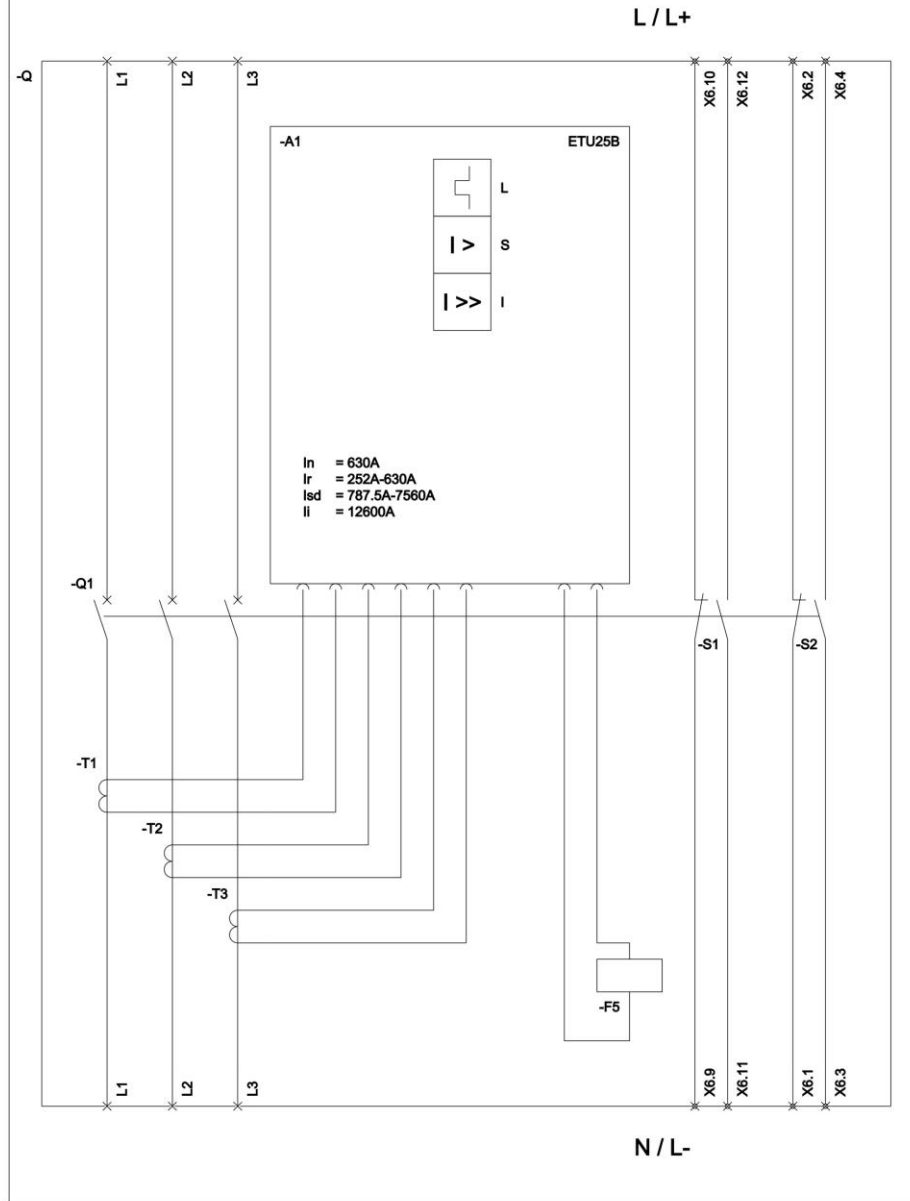

L (Long Time Delay / Überlastschutz); S (Short Time Delay / Kurzschlusschutz, kurzzeitverzögert);
I (Instantaneous / Kurzschlusschutz, unverzögert); F5 (Maglatch for trip unit / Auslösemagnet);
S1 - S8 (Auxiliary switch / Hilfschalter);